




7-12 m³/min

Mobiele Luchtcompressoren



Model		7/71	12/56	14/85	10/105	9/110	7/120
COMPRESSOR							
Capaciteit - m ³ /min (cfm)		7,1 (250)	5,6 (200)	8,5 (300)	10,3 (365)	10,6 (375)	12,0 (425)
Werkdruk - bar (psi)		7,0 (100)	12,1 (175)	14,0 (200)	10,3 (150)	8,6 (125)	7,0 (100)
Maximale werkdruk - bar (psi)		8,6 (125)	13,0 (190)	15,5 (225)	12,1 (175)	10,3 (150)	8,6 (125)
Instelling veiligheidsklep - bar (psi)		10,0 (145)	15,0 (217)	17,2 (250)	13,8 (200)	13,8 (200)	10,3 (150)
MOTOR							
Merk		Ingersoll Rand	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand	Ingersoll Rand
Type		4IRI8TE	4IRI8TE	4IRD5AE	4IRD5AE	4IRD5AE	4IRD5AE
Aantal cilinders		4	4	4	4	4	4
Vollast toerental - tpm		2300	2300	2200	2200	2200	2200
Vermogen kW (pk)		59,2 (79,4)	59,2 (79,4)	93 (125)	93 (125)	93 (125)	93 (125)
Elektrisch systeem - volt		12	12	24	24	24	24
Koeling		Water	Water	Water	Water	Water	Water
Brandstoftankinhoud - liter		112	112	219	219	219	219
Luchtaansluitingen - BSPT (Britse Norm Gasschroefdraad)		1 x 11/4 & 3 x 3/4	1 x 11/4 & 3 x 3/4	1 x 11/4 & 3 x 3/4	1 x 11/4 & 3 x 3/4	1 x 11/4 & 3 x 3/4	1 x 11/4 & 3 x 3/4
GEGEVENS GELUIDSNIVEAU							
Voldoet volledig aan de richtlijn inzake geluidsemisatie buitenshuis 2000/14/EC (2006)	LWa	99	99	99	99	99	99
BANDEN							
Bandenmaat		185 R14 C	185 R14 C	205/75 R16	205/75 R16	205/75 R16	205/75 R16
Aantal wielen		2	2	2	2	2	2
AFMETINGEN (MET ONDERSTEL)							
Lengte (vaste dissel) - mm	(A)	3565	3565	4120	4120	4120	4120
Lengte min~max (verstelbare dissel) - mm	(A)	3806 ~ 4062	3806 ~ 4062	4262 ~ 4478	4262 ~ 4478	4262 ~ 4478	4262 ~ 4478
Breedte - mm	(B)	1700	1700	1985	1985	1985	1985
Hoogte - mm	(C)	1545	1545	1810	1810	1810	1810
Hoogte tot onderzijde bak - mm	(D)	250	250	250	250	250	250
Gewicht (netto) (vast/verstelbaar) - kg (Voor opgebouwde generator - plus (kg))		1250 / 1290	1250 / 1290	1935/1965	1935/1965	1935 / 1965	1935 / 1965
Bedrijfsgegewicht (vast/verstelbaar) - kg (Voor opgebouwde generator - plus (kg))		1345 / 1385	1345 / 1385	2121 / 2151	2121 / 2151	2121 / 2151	2121 / 2151
AFMETINGEN (ZONDER ONDERSTEL)							
Lengte - mm		2475	2475	2675	2675	2675	2675
Breedte - mm		1200	1200	1380	1380	1380	1380
Hoogte - mm		1427	1427	1400	1400	1400	1400
Gewicht (netto) - kg		1196	1196	1660	1660	1660	1660
Bedrijfsgegewicht - kg		1296	1296	1830	1830	1830	1830

* Of 215/75 R16

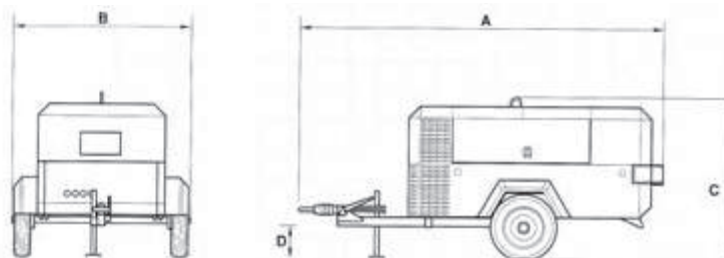

www.doosanportablepower.com

DOOSAN Doosan Infracore
Portable Power

